



Provides up to 20 times longer cycle life and 5 times longer float/service life than lead acid, battery help to minimize replacement costs and reduce total cost of ownership.


Batter gravimetric/volumetric specific energy up to 3 times compare with lead acid battery.

Deliver twice energy of the lead acid battery, when discharged with heavy load.

Build-in BMS -- Eliminates the risk of explosion or combustion due to high impact,overcharging or short circuit situation with safe lithium iron phosphate chemistry.

Design to replace VRLA battery, compatible with conventional lead acid powered system.

Operating Performance

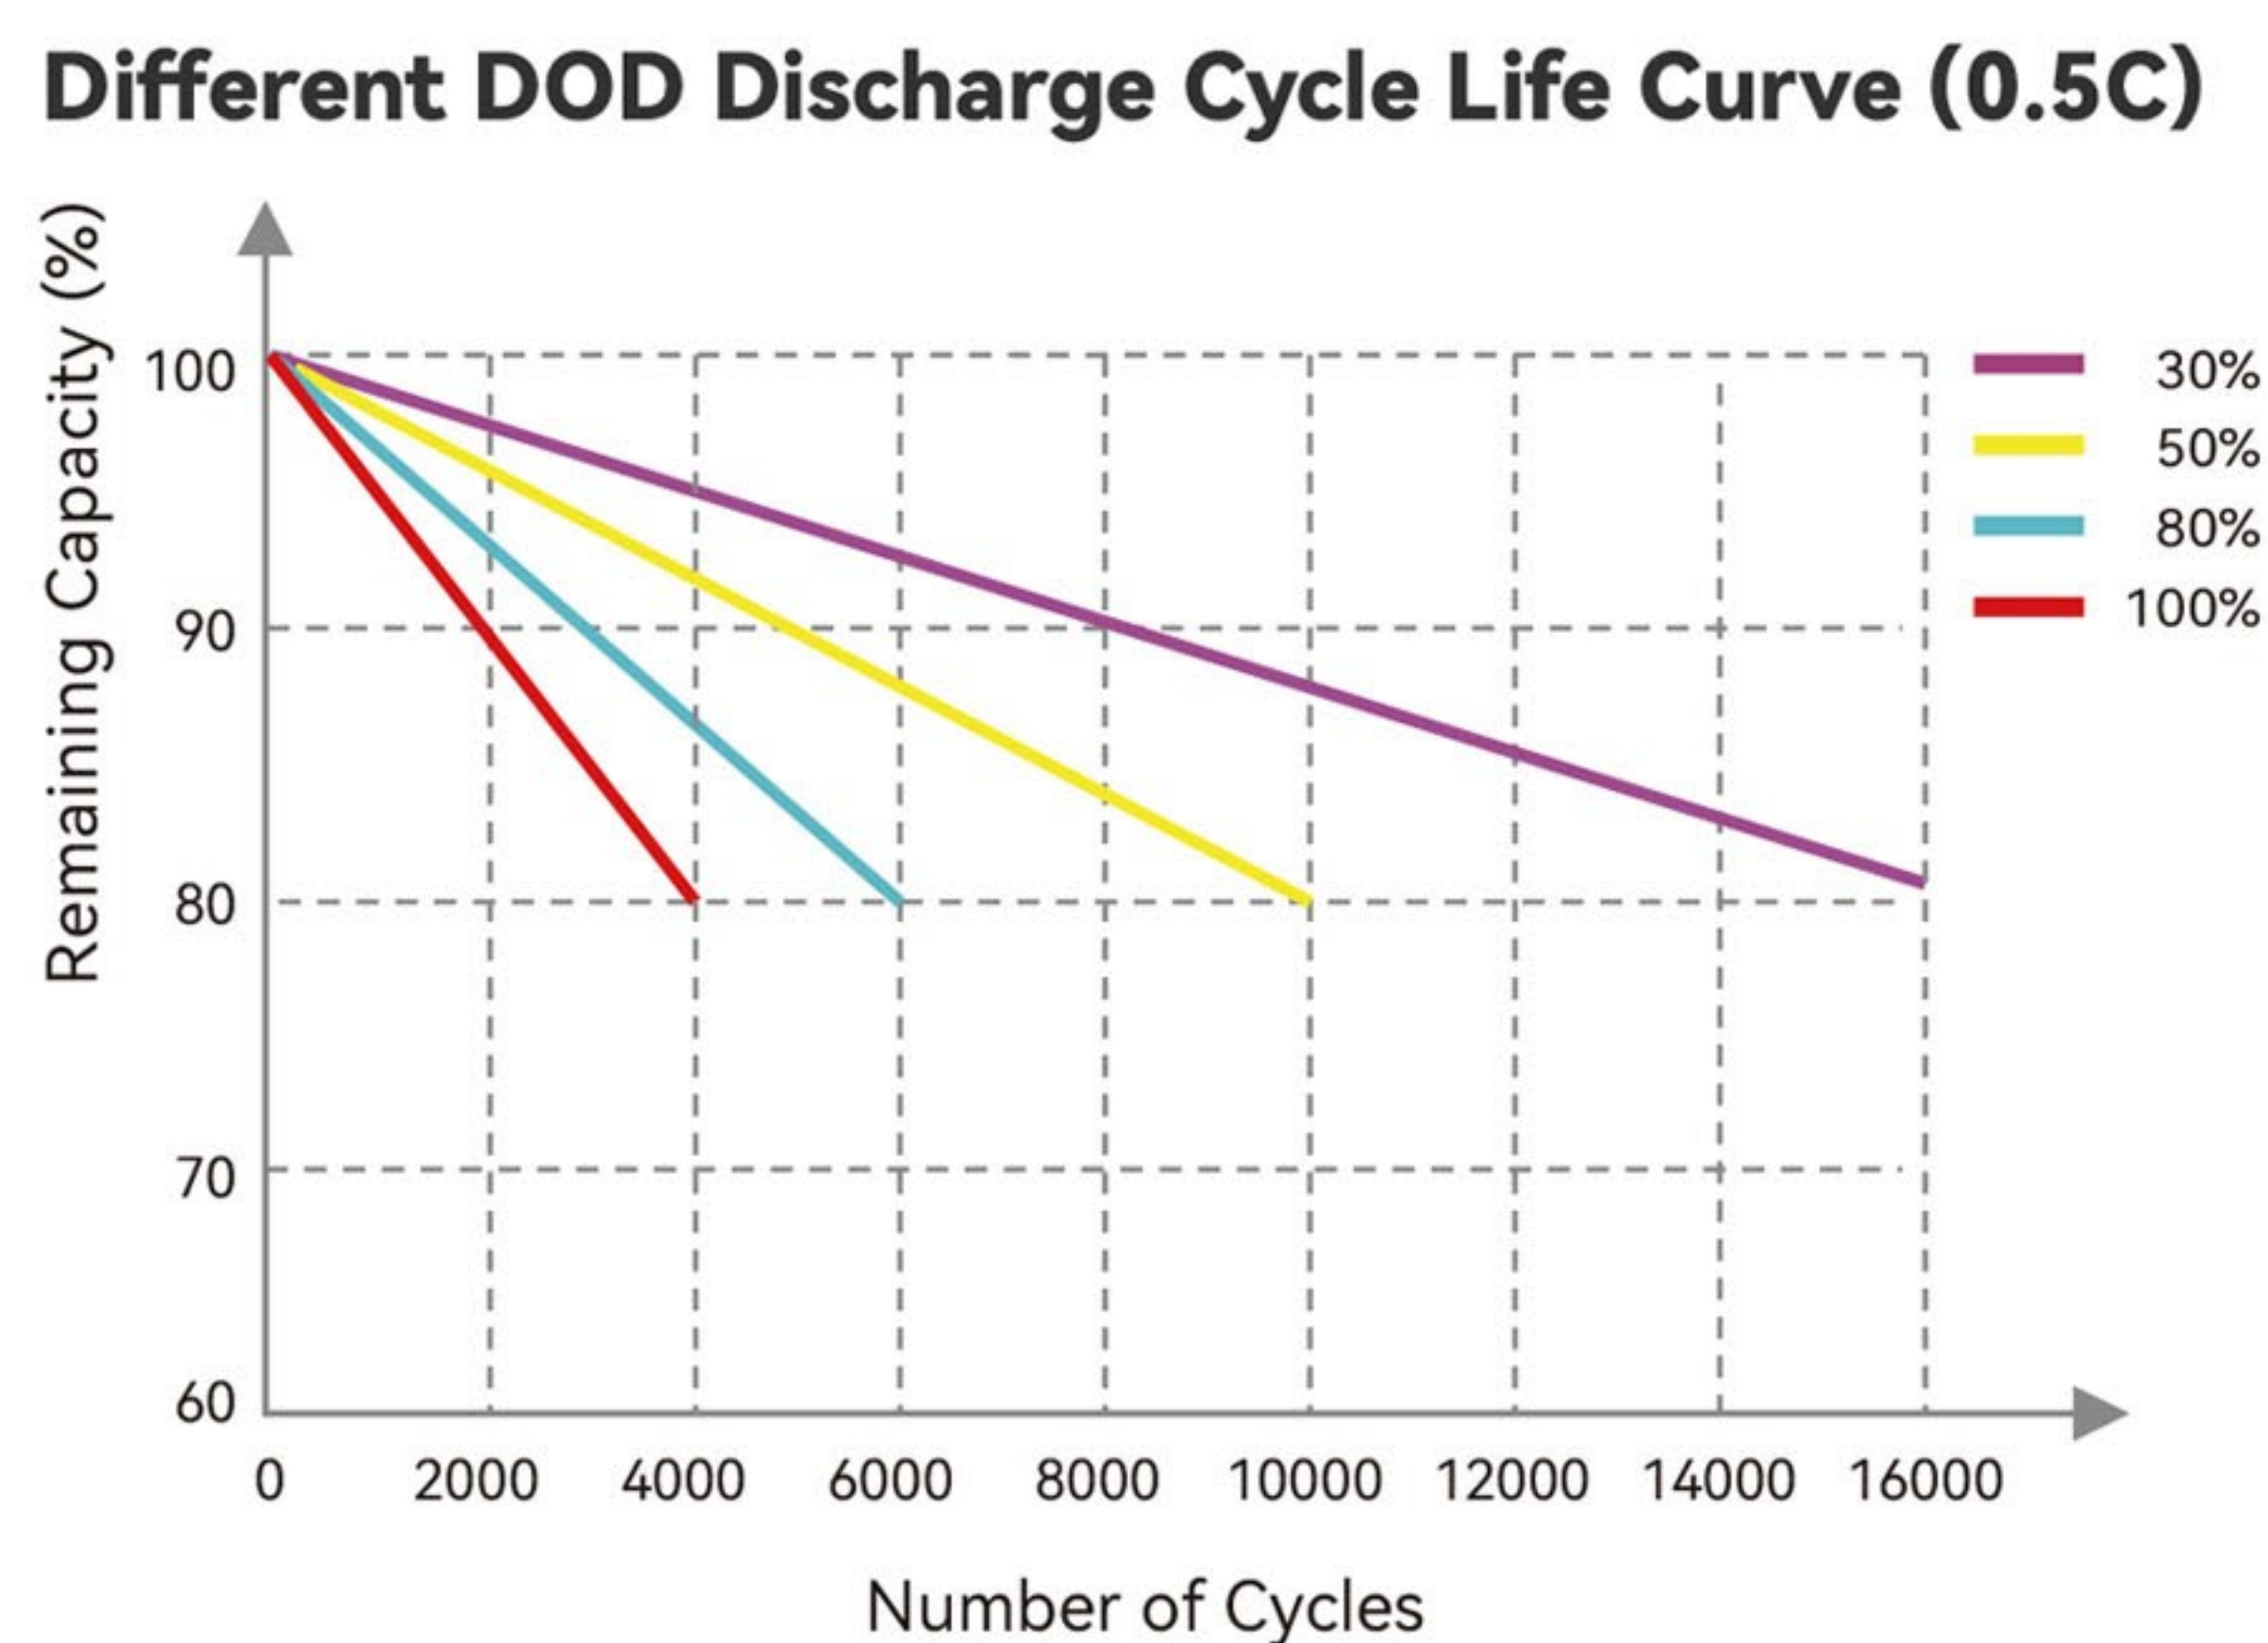


Battery should be kept in a dry and ventilated place, avoid direct contact with corrosive substances, also away from sources of fire and heat. Keep the SOC of the battery above 50% if you need to store it for an extended long period, It should be refresh charged every 3 months regularly and SOC should be maintained at about 50% if battery will be stored for a long term..

Shenzhen Consnant Technology Co.,Ltd.
Building B6, Junfeng Industrial Park, Yonghe Road,
Fuhai Sub-District, Bao'an District, Shenzhen City, 518103 P.R.China.

Web: www.consnant.com
T e l: 0086-755-29772323
F a x: 0086-755-29772626

LITHIUM ION IRON PHOSPHATE BATTERY(LIFEPO4)

Applications

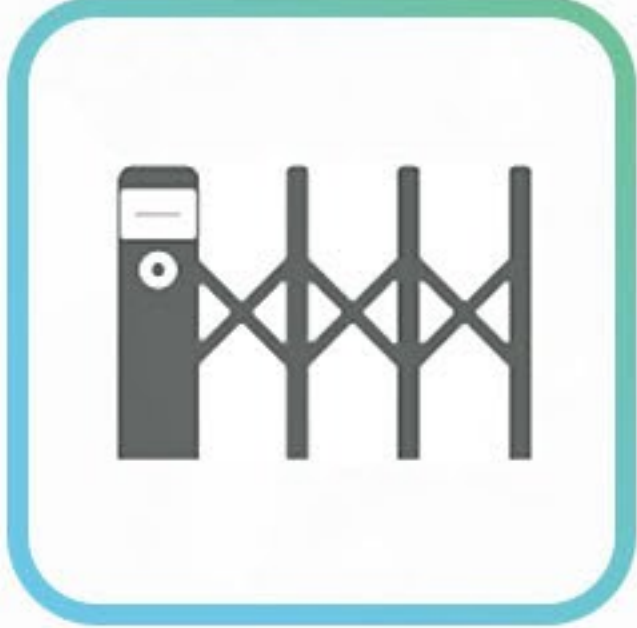

E Sliding Gate



Electric Toy



UPS



Solar Street Light



Renewable Energy



Medical Equipment

Technical Parameters

Model	CNS-L1208
Nominal Voltage (V)	12.8
Nominal Capacity (Ah)	8
Total Energy (Wh)	102.4
End Charge Voltage (V)	14.6
Discharge Cut-of Voltage (V)	10
Float Charge Voltage (V)	13.8
Standard Charge/Discharge Current (A)	4 CH/8 DCH
Max. Charge/Discharge Current (A)	8 CH/10 DCH
Peak Output Current (A)	15@60s
Lithium Chemistry	LiFePO4
Cycle Life	6000 @ 0.5C 80% DOD
Design Life	20 Years
Scalability	2P or 2S
Mechinical Specificatios	
Dimension (mm)	W151 * D65 * H94
Weight (kg)	Approx.1
Ingress Rating	IP 65
Safety Standards	UN38.3, CE
Environmental Specifications	
Storage Temperature (°C)	-20 ~ 55
Operating Temperature Charge (°C)	0 ~ 55
Operating Temperature Discharge (°C)	-20 ~ 60
Operating Relative Humidity	5 ~ 95%